



Work positioning lanyard with a rope clamp for your safe and efficient work at height.

DESCRIPTION

The rope is ended with a knot protected by heat-shrinkable plastic.

Also available with a sewn-in connector (EN 362) and spare part SITE LANYARD.

11 mm rope sewn into a non-detachable version of the multifunctional device LOCKER. LOCKER is equipped with a parking cam for fixing the device in the desired position.



Strap in the knot facilitates handling on the work harness.

The rope is ended with a sewn-in eye with a plastic cover, which also serves to fix the carabiner in the ideal position.

The rope is protected by a tubular PAD cover.

KEY FEATURES

- simple and quick handling allows you to do your work safely and efficiently

STANDARDS

CE 1019

EN 353-2
EN 358

FEATURES



200; 400 cm 78.7; 157.5 in	1 person only	150 kg 330.7 lb	420 g / 14.8 oz (200 cm version)	unique number	3 years warranty

MATERIALS



- 52 % PAD
- 45 % light alloy
- 2 % stainless steel
- 1 % PVC

TECHNICAL DATA

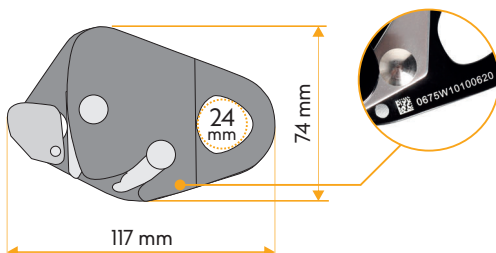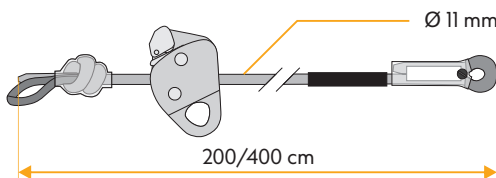

Unique number marking □XXXXW1010MMYY

- = datamatrix
- XXXX = unique number
- W1010 = product code
- MMYY = month and year of production

